

Recombinations of Busy Beaver Machines

Norbert Bátfai
 University of Debrecen
 Department of Information Technology
 batfai.norbert@inf.unideb.hu

September 7, 2009

Abstract

Many programmers believe that Turing-based machines cannot think. We also believe in this, however it is interesting to note that the most sophisticated machines are not programmed by human beings. We have only discovered them. In this paper, using well-known Busy Beaver and Placid Platypus machines, we generate further very similar, but not exactly the same machines. We have found a recombined BB_5 machine which can make 70.740.809 steps before halting.

Keywords: *Busy Beaver, Placid Platypus.*

Contents

1	Introduction	2
2	Recombinations of machines	2
2.1	Combining well-known machines	2
2.2	The starting machines	3
2.3	Recombinations of machines	6
2.3.1	$\mathcal{M}_{PP}(4097)$	7
2.3.2	$\mathcal{M}_{PP}(4096)$	9
2.3.3	$\mathcal{M}_{PP}(4095)$	10
3	Conclusion and further work	11
A	Other recombinations	11
A.1	$\mathcal{M}_{PP}(239)$	11
A.2	$\mathcal{M}_{PP}(20)$	13
B	Some C code snippets	14
B.1	The starting machines	14

1 Introduction

Many people and many programmers believe that a computer program cannot think. We also believe in this, because Turing machines have no consciousness, they cannot flip a coin, and so on. But unfortunately, nowadays we are not able to be more precise in this question. However it is interesting to note that the most sophisticated machines are not programmed by us. We have only discovered them.

In the following we have restricted ourselves to the case of Busy Beaver machines because radically advanced machines may be found among these Turing machines. We employ the notations introduced in [Bátfai, 2009]. The Busy Beaver problem, introduced by Tibor Radó more than 40 years ago, is to find the n -state, binary tape Turing machine that is starting with the empty word and has written the greatest number of ones on the tape. The Placid Platypus problem, introduced by Harland in [Harland, 2006], is the inverse problem of Busy Beaver. It is to find the fewest number of states binary tape Turing machine that is starting with the empty word and has written n ones on the tape.

For example the 5-state winner candidate (Marxen-Buntrock) machine is a very special machine. It can make $47.176.869^1$ steps before halting. Let us try it. This machine cannot be created by any usual programming methods. It works in such a way that we would never be able to develop it from entirely scratch.

In our paper, we simply combine some well-known machines to produce new machines. This work was suggested by a paper from Michel. He wrote in [Michel, 2009, pp. 11] that according to Marxen in range from 4096 to 4098 there are no further machines.

2 Recombinations of machines

2.1 Combining well-known machines

Definition 1 (Recombinations). *Let $T_{i_1}, \dots, T_{i_k}$ be BB_n Turing machines. A recombination of machines $T_{i_1}, \dots, T_{i_k}$ is a $(2k-1)$ -tuple $T_{i_{k+1}} = (T_{i_1}, \dots, T_{i_k}, v_{j_1}, \dots, v_{j_{k-1}})$ where $T_{i_1}, \dots, T_{i_k}$ are the source machines, $0 \leq v_{j_m} \leq v_{j_{m+1}} \leq 2n-1$ and the partial transition function of recombined machine $T_{i_{k+1}}$ is*

¹The variant of definition of Turing machine used by us may changes the Busy Beaver functions. For example, Radó's $S(n)$ may equals to $S(n)$ or $S(n) - 1$. For the details we refer to [Bátfai, 2009, pp. 5].

defined as

$$\begin{aligned}
& (f_{T_{i_1}}^0 \rightarrow t_{T_{i_1}}^0, f_{T_{i_1}}^1 \rightarrow t_{T_{i_1}}^1, \dots, f_{T_{i_1}}^{v_{j_1}-1} \rightarrow t_{T_{i_1}}^{v_{j_1}-1} \\
& f_{T_{i_2}}^{v_{j_1}} \rightarrow t_{T_{i_2}}^{v_{j_1}}, f_{T_{i_2}}^{v_{j_1}+1} \rightarrow t_{T_{i_2}}^{v_{j_1}+1}, \dots, f_{T_{i_2}}^{v_{j_2}-1} \rightarrow t_{T_{i_2}}^{v_{j_2}-1} \\
& \vdots \\
& f_{T_{i_k}}^{v_{j_{k-1}}} \rightarrow t_{T_{i_k}}^{v_{j_{k-1}}}, f_{T_{i_k}}^{v_{j_{k-1}}+1} \rightarrow t_{T_{i_k}}^{v_{j_{k-1}}+1}, \dots, f_{T_{i_k}}^{2n-1} \rightarrow t_{T_{i_k}}^{2n-1})
\end{aligned}$$

where $f_T^i \rightarrow t_T^i$ is the i -th transition rule of machine T .

Example 1. Let T_i , T_j and T_k be three BB_5 Turing machines. A recombination of machines T_i , T_j and T_k is a quintuple $R = (T_i, T_j, T_k, u, v)$ where T_i , T_j and T_k are the source machines, $0 \leq u \leq v \leq 9$. This machine R is shown in Figure 1.


rules from the i-th machine	
rules from the j-th machine	u
rules from the k-th machine	v

Figure 1: Rules of the recombined machine R .


2.2 The starting machines

We have started some well known BB_5 machines. The first six, the two winner candidate $\mathcal{M}_{PP}(4097)^2$, two $\mathcal{M}_{PP}(4096)$ and two $\mathcal{M}_{PP}(4095)$ machines shown in Figure 2 are discovered by Marxen and Buntrock [Michel, 2009]. The next three, $\mathcal{M}_{PP}(1471)$, $\mathcal{M}_{PP}(1915)$ and $\mathcal{M}_{PP}(501)$ machines shown in Figure 3 are found by Uhing and Schult [Michel, 2009]. Finally, the residual some $\mathcal{M}_{PP}(160)$, $\mathcal{M}_{PP}(32)$, $\mathcal{M}_{PP}(26)$, $\mathcal{M}_{PP}(21)$ and from $\mathcal{M}_{PP}(19)$ to $\mathcal{M}_{PP}(2)$ machines are found by our own programs [Bátfai, 2009].


²The variant of definition of Turing machine used by us may changes the Busy Beaver functions. For example, Radó's $\Sigma(n)$ may equals to $\Sigma(n)$ or $\Sigma(n) - 1$. For the details we refer to [Bátfai, 2009, pp. 5].

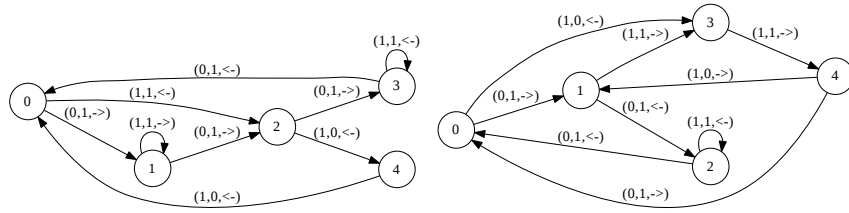

(a) 4097, 47.176.869, (9, 0, 11, 1, 15, 2, (b) 4096, 23.554.763, (9, 0, 11, 1, 18, 2, 17, 3, 11, 4, 23, 5, 24, 6, 3, 7, 21, 9, 0) 15, 3, 23, 4, 3, 5, 15, 7, 29, 8, 5, 9, 8)

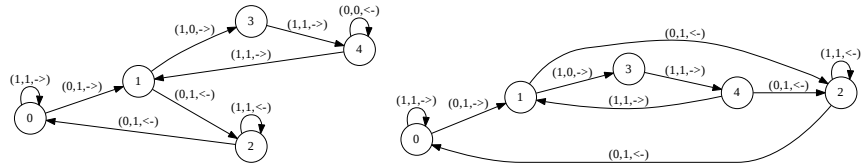


(c) 4095, 11.804.909, (9, 0, 11, 1, 5, (d) 4095, 11.804.895, (9, 0, 11, 1, 5, 2, 15, 3, 2, 15, 3, 20, 4, 3, 5, 15, 7, 29, 8, 24, 20, 4, 3, 5, 15, 7, 29, 8, 15, 9, 11) 9, 11)

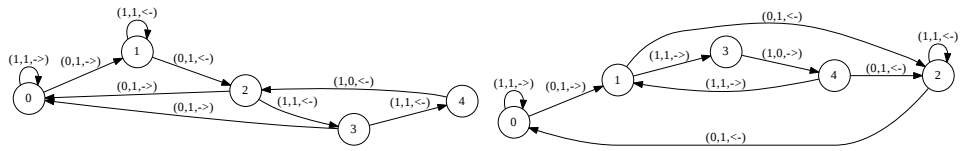


(e) 4097, 11.798.825, (9, 0, 11, 1, 5, 2, 15, 3, (f) 4096, 11.798.795, (9, 0, 11, 1, 5, 2, 15, 3, 9, 4, 5, 5, 21, 6, 5, 7, 27, 9, 12) 23, 4, 3, 5, 15, 7, 26, 8, 15, 9, 11)

Figure 2: Marxen and Buntrock's winner candidate machines, # of 1's, # of steps, name of the machine.

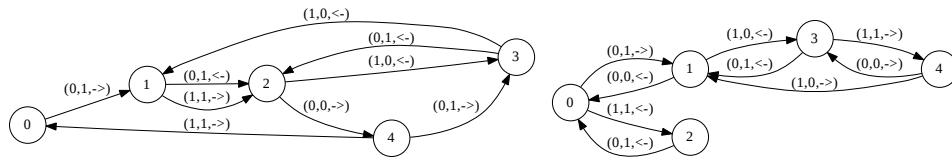

(a) 1471, 2.358.063, (9, 0, 11, 2, 15, 3, 17, 4, 26, (b) 1915, 2.133.491, (9, 0, 11, 1, 15, 2, 5, 18, 6, 15, 7, 6, 8, 23, 9, 5)
0, 3, 18, 4, 3, 6, 9, 7, 29, 8, 20, 9, 8)

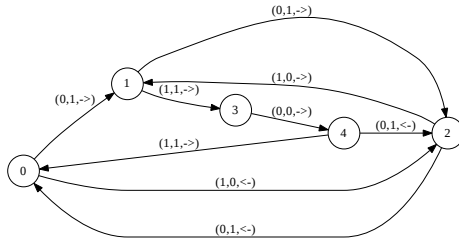

(c) 501, 134.466, (9, 0, 11, 1, 12, 2, 17, 3, 23, 4, 3, 5, 8, 6, 26, 8, 15, 9, 5)

Figure 3: Uhing, and Schult machines, # of 1's, # of steps, name of the machine.

2.3 Recombinations of machines

In this section, from Figure 5, we show machines which are recombined by our program from the starting machines. These are very similar to the starting machines, but different ones.

Example 2. *The machine in figure 7(b), is found on the following "evolutionary tree" shown in Figure 4. The names of the contained Turing machines may be decrypted using row indexes in code snippets in Appendix B.1.*



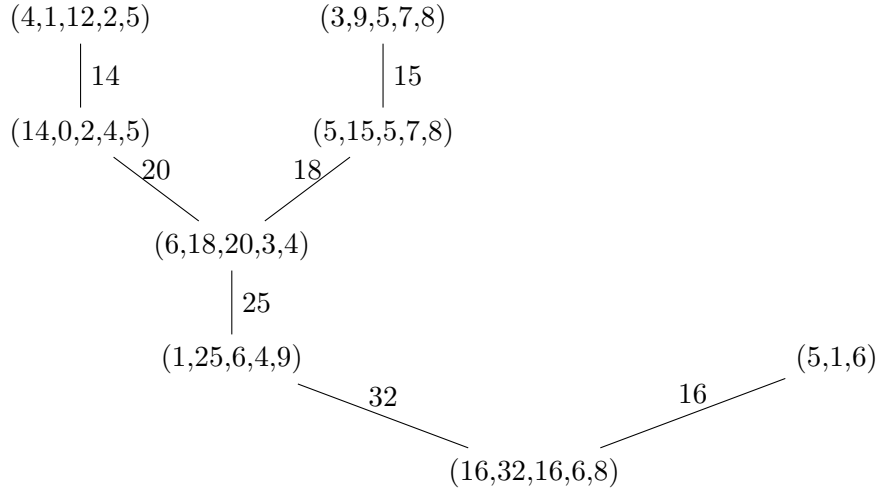


Figure 4: Evolutionary tree of machine (9, 0, 11, 1, 5, 2, 15, 3, 23, 4, 3, 5, 15, 7, 29, 8, 24, 9, 8) shown in Figure 7(b).


2.3.1 $\mathcal{M}_{PP}(4097)$

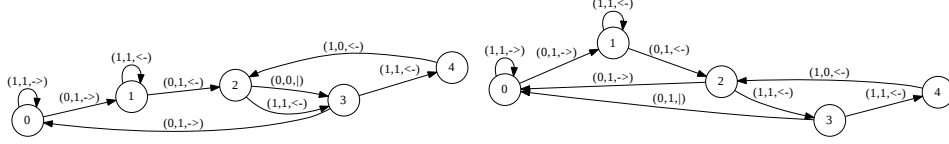


(a) 4097, 11.801.882, (9, 0, 11, 1, 5, 2, 15, (b) 4097, 11.798.832, (9, 0, 11, 1, 5, 2, 15, 3, 9, 4, 19, 5, 21, 6, 5, 7, 27, 9, 12) 9, 4, 5, 5, 21, 6, 4, 7, 27, 9, 12)

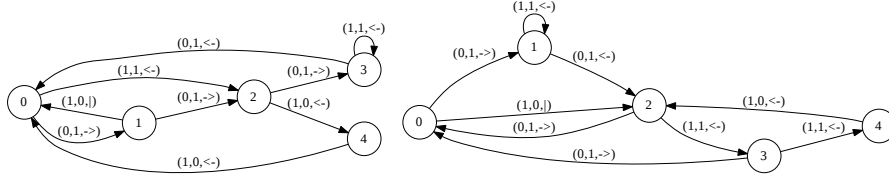

(c) 4097, 70.740.809, (9, 0, 11, 1, 15, (d) 4097, 17.689.051, (9, 0, 11, 1, 13, 2, 15, 3, 2, 17, 3, 1, 4, 23, 5, 24, 6, 3, 7, 21, 9, 4, 5, 5, 21, 6, 5, 7, 27, 9, 12) 9, 0)

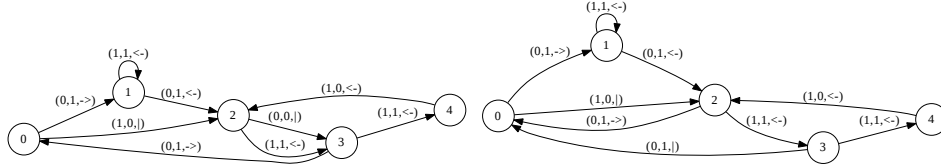

(e) 4097, 23.582.334, (9, 0, 11, 1, 13, 2, 15, (f) 4097, 17.689.065, (9, 0, 11, 1, 13, 2, 15, 3, 9, 4, 19, 5, 21, 6, 5, 7, 27, 9, 12) 3, 9, 4, 5, 5, 21, 6, 4, 7, 27, 9, 12)



(g) 4097, 11.804.946, (9, 0, 11, 1, 5, 2, 15, 3, 9, 4, 19, 5, 21, 6, 4, 7, 27, 9, 12)

Figure 5: Recombinations of BB_5 machines, $\mathcal{M}_{PP}(4097)$ machines, # of 1's, # of steps, name of the machine.

Remark 1. We should remark that we differ from Radó's original Turing machine model. We have used an unusual Turing machine model for Busy Beaver problem. On the one hand, the definition of Turing machine used by us may changes the Busy Beaver function, because we do not use an extra halting state, for the details we refer to [Bátfai, 2009, pp. 5]. And on the other hand, staying on the same tape cell on a given step is permitted by our model.

If we compare Marxen and Buntrock's original machine shown in Figure 2(a) and the recombined machine shown in Figure 5(c) we will notice


that in case of these machines the transition rule $(1, 1) \rightarrow (1, 1, \rightarrow)$ may be replaced with the following two "unusual" rules $(0, 0) \rightarrow (1, 1, \rightarrow)$ and $(1, 1) \rightarrow (0, 0, |)$.




- (a) $(1, 1) \rightarrow (1, 1, \rightarrow)$ (b) $(0, 0) \rightarrow (1, 1, \rightarrow)$ and $(1, 1) \rightarrow (0, 0, |)$

Figure 6: Stepping over a block of ones.

2.3.2 $\mathcal{M}_{PP}(4096)$

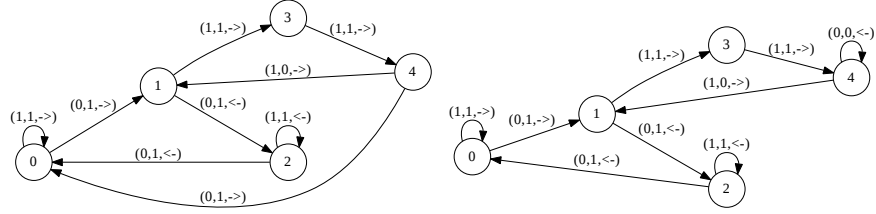


(a) 4096, 11.792.681, (9, 0, 11, 1, 5, 2, (b) 4096, 11.792.723, (9, 0, 11, 1, 5, 2, 15, 3, 23, 4, 3, 5, 15, 7, 29, 8, 5, 9, 8) 15, 3, 23, 4, 3, 5, 15, 7, 29, 8, 24, 9, 8)




(c) 4096, 11.803.885, (9, 0, 11, 1, 5, 2, 15, 3, 23, 4, 3, 5, 15, 7, 26, 8, 15, 9, 1)

Figure 7: Recombinations of BB_5 machines, $\mathcal{M}_{PP}(4096)$ machines, # of 1's, # of steps, name of the machine.


2.3.3 $\mathcal{M}_{PP}(4095)$



(a) 4095, 11.815.075, (9, 0, 11, 1, 5, 2, 15, 3, 20, 4, 3, 5, 15, 7, 29, 8, 15, 9, 0) (b) 4095, 11.809.985, (9, 0, 11, 1, 5, 2, 15, 3, 20, 4, 3, 5, 15, 7, 29, 8, 15, 9, 1)

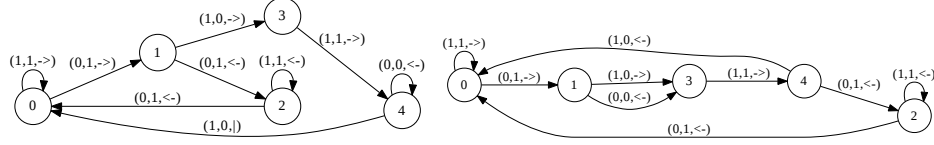

(c) 4095, 11.810.006, (9, 0, 11, 1, 5, 2, 15, 3, 20, 4, 3, 5, 15, 7, 29, 8, 24, 9, 1) (d) 4095, 11.821.189, (9, 0, 11, 1, 5, 2, 18, 3, 20, 4, 3, 5, 15, 7, 29, 8, 15, 9, 0))



(e) 4095, 11.816.099, (9, 0, 11, 1, 5, 2, 18, 3, 20, 4, 3, 5, 15, 7, 29, 8, 15, 9, 1)) (f) 4095, 11.811.009, (9, 0, 11, 1, 5, 2, 18, 3, 20, 4, 3, 5, 15, 7, 29, 8, 15, 9, 11))

Figure 8: Recombinations of BB_5 machines, $\mathcal{M}_{PP}(4095)$ machines, # of 1's, # of steps, name of the machine.

3 Conclusion and further work

In [Michel, 2009, pp. 11] Michel wrote that according to Marxen in range from 4096 to 4098 there are only six machines which are listed in mentioned paper too. Hence, we were surprised that, using simply recombination methods, very similar, but different machines may be generated. For example, we have found a recombinated BB_5 machine which can make 70.740.809 steps before halting. This machine was shown in Figure 5(c) and their transition rules are shown in Figure 9. The number 70.740.809 may be the new winner candidate for Radó S function for $n = 5$. We would get that $S(5) = 70.740.810$ and $\sigma(5) = 4098$ if we added the rule $(4, \mathbf{0}) \rightarrow (H, \mathbf{1}, \rightarrow)$ to this recombinated machine.


```
(0, 0) -> (1, 1, 2)
(0, 1) -> (2, 1, 0)
(1, 0) -> (2, 1, 2)
(1, 1) -> (0, 0, 1)
(2, 0) -> (3, 1, 2)
(2, 1) -> (4, 0, 0)
(3, 0) -> (0, 1, 0)
(3, 1) -> (3, 1, 0)
(4, 1) -> (0, 0, 0)
```

Figure 9: 4097, 70.740.809, (9, 0, 11, 1, 15, 2, 17, 3, 1, 4, 23, 5, 24, 6, 3, 7, 21, 9, 0).


A Other recombinations

Our recombining and other related search programs are running. These programs and related data can be downloaded from <http://www.inf.unideb.hu/~nbatfai/bb>. We have already found machines from the following sets, $\mathcal{M}_{PP}(20)$, $\mathcal{M}_{PP}(26)$, $\mathcal{M}_{PP}(27)$, $\mathcal{M}_{PP}(28)$, $\mathcal{M}_{PP}(30)$, $\mathcal{M}_{PP}(32)$, $\mathcal{M}_{PP}(39)$, $\mathcal{M}_{PP}(40)$, $\mathcal{M}_{PP}(239)$. Finally we show some interesting $\mathcal{M}_{PP}(239)$ and $\mathcal{M}_{PP}(20)$ recombined machines.

A.1 $\mathcal{M}_{PP}(239)$

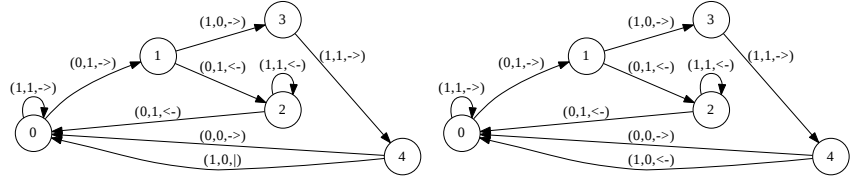


(a) 239, 41.082, (9, 0, 11, 1, 5, 2, 15, 3, 20, 4, 3, 5, 15, 7, 29, 8, 2, 9, 1) (b) 239, 41.359, (9, 0, 11, 1, 5, 2, 15, 3, 20, 4, 3, 5, 15, 7, 29, 8, 2, 9, 0))

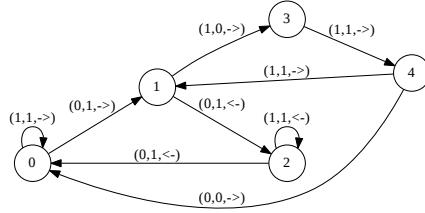


(c) 239, 40.805, (9, 0, 11, 1, 5, 2, 15, 3, 20, 4, 3, 5, 15, 7, 29, 8, 2, 9, 11))

Figure 10: Recombinations of BB_5 machines, two $\mathcal{M}_{PP}(239)$ machines, # of 1's, # of steps, name of the machine.

A.2 $\mathcal{M}_{PP}(20)$

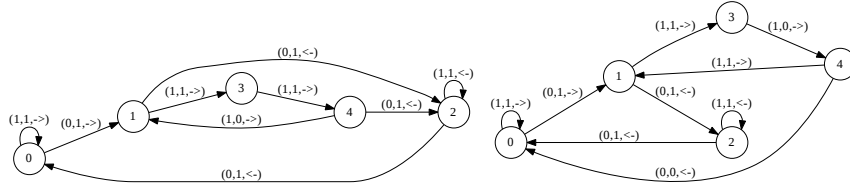

(a) 20, 279, (9, 0, 11, 1, 5, 2, 15, 3, 23, 4, 3, 5, 15, 7, 29, 8, 15, 9, 8) (b) 20, 297, (9, 0, 11, 1, 5, 2, 15, 3, 23, 4, 3, 5, 15, 7, 26, 8, 0, 9, 11)

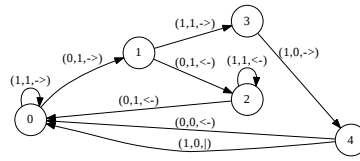

(c) 20, 314, (9, 0, 11, 1, 5, 2, 15, 3, 23, 4, 3, 5, 15, 7, 26, 8, 0, 9, 1)

Figure 11: Recombinations of BB_5 machines, a $\mathcal{M}_{PP}(20)$ machine, # of 1's, # of steps, name of the machine.

B Some C code snippets

B.1 The starting machines

The rows contained in this code snippet may be used to decrypt the recombinations of Turing machines.

```
...
// Marxen-Buntrock, 4097,
{0, 11, 1, 15, 2, 17, 3, 11, 4, 23, 5, 24, 6, 3, 7, 21, 9, 0 }, // 0
// Marxen-Buntrock, 4096
{0, 11, 1, 18, 2, 15, 3, 23, 4, 3, 5, 15, 7, 29, 8, 5, 9, 8 }, // 1
// Marxen-Buntrock, 4095
{0, 11, 1, 5, 2, 15, 3, 20, 4, 3, 5, 15, 7, 29, 8, 24, 9, 11 }, // 2
// Marxen-Buntrock, 4095
{0, 11, 1, 5, 2, 15, 3, 20, 4, 3, 5, 15, 7, 29, 8, 15, 9, 11 }, // 3
// Marxen-Buntrock, 4097
{0, 11, 1, 5, 2, 15, 3, 9, 4, 5, 5, 21, 6, 5, 7, 27, 9, 12 }, // 4
// Marxen-Buntrock, 4096
{0, 11, 1, 5, 2, 15, 3, 23, 4, 3, 5, 15, 7, 26, 8, 15, 9, 11 }, // 5
// Uhing, 1471
{0, 11, 2, 15, 3, 17, 4, 26, 5, 18, 6, 15, 7, 6, 8, 23, 9, 5 }, // 6
// Uhing, 1915
{0, 11, 1, 15, 2, 0, 3, 18, 4, 3, 6, 9, 7, 29, 8, 20, 9, 8 }, // 7
// Schult, 501
{0, 11, 1, 12, 2, 17, 3, 23, 4, 3, 5, 8, 6, 26, 8, 15, 9, 5 }, // 8
// 160
{0, 9, 1, 12, 2, 15, 3, 21, 4, 29, 5, 1, 7, 24, 8, 2, 9, 27 }, // 9
// 32
{0, 21, 1, 9, 2, 24, 3, 6, 4, 3, 5, 20, 6, 17, 7, 0, 9, 15 }, // 10
// 26
{0, 9, 1, 11, 2, 17, 3, 21, 4, 19, 5, 29, 6, 5, 7, 6, 8, 8 }, // 11
// 21
{0, 9, 1, 11, 2, 15, 3, 20, 4, 21, 5, 27, 6, 4, 7, 2, 8, 12 }, // 12
// 19
{0, 9, 1, 11, 2, 26, 3, 23, 4, 27, 5, 2, 7, 17, 8, 5, 9, 13 }, // 13
...
```

References

- N. Bátfai. On the running time of the shortest programs. *CoRR*, abs/0908.1159, 2009. URL <http://www.citebase.org/abstract?id=oai:arXiv.org:0908.1159>.
- J. Harland. The busy beaver, the placid platypus and other crazy creatures. In *CATS '06: Proceedings of the 12th Computing: The Australasian Theory Symposium*, pages 79–86. Australian Computer Society, Inc., 2006.
- P. Michel. The busy beaver competition: a historical survey, 2009. URL <http://www.citebase.org/abstract?id=oai:arXiv.org:0906.3749>.